


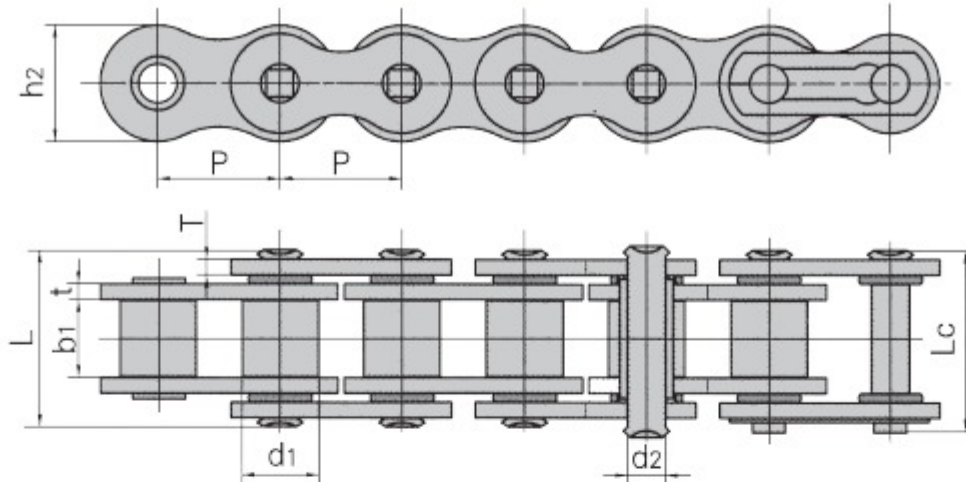

Chain No.	Pitch	Roller diameter	Width between plates	Pin diameter	Pin length		Plate height	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 max	d2 max	L max	Lc max	h2 max	t/T max	Q min	Qo min	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
08B OR	12,700	8,51	7,75	4,45	18,8	19,9	11,80	1,60	18,0/4091	19,40	0,74
10B OR	15,875	10,16	9,65	5,08	21,4	22,2	11,70	1,60	20,7/4704	24,70	0,95
12B OR	19,050	12,07	11,68	5,72	25,4	26,4	16,10	1,80	30,4/6910	39,50	1,25
16B OR	25,400	15,88	17,02	8,28	39,3	40,4	20,80	3,2/4,0	60,0/13635	70,80	3,61

40 OR	12,700	7,95	7,85	3,96	18,3	19,6	12,00	1,50	14,1/3205	17,50	0,67
50 OR	15,875	10,16	9,40	5,08	23,1	24,8	15,09	2,03	22,2/5045	29,40	1,19
60 OR	19,050	11,91	12,57	5,94	28,5	30,4	18,00	2,42	31,8/7227	41,50	1,62
60H OR	19,050	11,91	12,57	5,94	31,7	33,2	18,00	3,25	55,0/12500	58,00	1,96
80 OR	25,400	15,88	15,75	7,92	35,6	37,3	24,00	3,25	56,7/12886	69,40	2,70
100 OR	31,750	19,05	18,95	9,53	43,3	47,0	30,00	4,00	88,5/20114	109,20	3,91
120 OR	38,100	22,23	25,22	11,11	54,0	57,5	35,70	4,80	127,0/28864	156,30	6,34